

## Flowfresh MF (3-4 mm)



### Description

Flowfresh MF is a chemical resistant, antimicrobial, polyurethane resin floor system with smooth matt coloured finish. Flowfresh MF incorporates Polygiene® - a performance based antimicrobial which inhibits the growth of bacteria, fungi, moulds and mildew.

### Typical Uses

Ideal for dry or semi-wet processing zones such as food or pharmaceutical packaging zones.


### Benefits

- Proven antimicrobial performance
- High chemical resistance
- Easy to clean and sterilise
- Non-tainting and non-dusting
- High abrasion resistance
- Low odour during application
- UV light stable grade is available
- Heat resistant to 90°C
- Monolithic
- Fast return to service


### Project References

B. Food, Saha Farms, CP, Sun Valley, Nestlé, Ajinomoto, Malee Sompran, Thai International Airway, Panus Poultry

### System Design

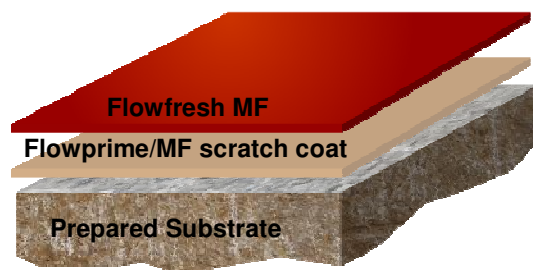

### Standard Colour Chart

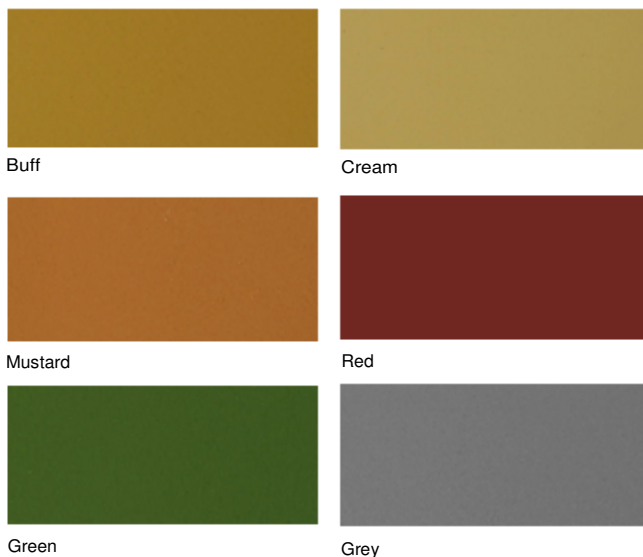

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

## Model Specification

Product: Flowfresh MF

Finish: Matt

Thickness: 3-4mm

Colour: \_\_\_\_\_

Preparatory work and application in accordance with manufacturer's instructions.

Manufacturer: Flowcrete Asia Sdn Bhd.

Telephone: Customer Service - + 603 6277 9575

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/ mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be surface dry and free from rising damp and ground water pressure.

## Available in Multi-Pack Supply Format

Flowfresh HF/MF/RT (A+B)

Flowfresh HF/MF/RT Filler C

## Products Included in this System

Flowprime or Flowfresh MF scratch coat

Flowfresh MF

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at [www.flowcrete.com.my](http://www.flowcrete.com.my).

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Asia Sdn Bhd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

## Microbial / Fungal Resistance

The Polygiene® antimicrobial additive incorporated into Flowfresh MF provides control of most bacteria and fungi which come into contact with the floor.

## Colour Stability

Flowfresh MF is not colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in light colours and blues but does not compromise the product's chemical resistance or physical characteristics. Consult our Technical Department for UV light stable specification.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance	BS476:Part 7 Surface Spread of Flame: Class 2 (indicative)
Slip Resistance	TRRL Pendulum Slip Test Dry 70 Wet 25
Impact Resistance	BS8204 Part1 Cat: A (<0.5mm) ISO6272 1kg weight >1.8m 2kg weight >1.5m
Temperature Resistance	From -5°C to 70°C (at 3mm) -15°C to 90°C (at 4mm)
Coefficient of Thermal Expansion	ASTM C531: 5.70 x 10 <sup>-5</sup> °C <sup>-1</sup>
Water Permeability	Nil-Karsten test (impermeable)
Vapour Permeability	ASTM E96:90 5g/m/24hrs (at 4mm thick)
Chemical Resistance	Contact Technical Department. Excellent resistance to sugars and most acids (organic and inorganic)
Abrasion Resistance	Taber Abrader: 0.1g loss per 1000 cycles (1kg load using CS17 wheels)
Compressive Strength	55 N/mm <sup>2</sup> (BS6319)
Flexural Strength	20 N/mm <sup>2</sup> (BS6319)
Tensile Strength	12 N/mm <sup>2</sup> (BS6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.
Toxicity (when cured)	Taint Free to sensitive foodstuffs

## Speed of Cure

	10 °C	20 °C	30 °C
Light traffic	36 hrs	24 hrs	12 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	10 days	7 days	6 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring system for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

Flowcrete Asia Sdn Bhd (366254-X)  
The Flooring Technology Centre  
Lot 37631 & 37632, Jalan 6/37A,  
Taman Bukit Maluri,  
Industrial Area Kepong,  
52100 Kuala Lumpur, Malaysia.  
Tel: +(603) 6277 9575  
Fax: +(603) 6277 4645  
Email: [malaysia@flowcrete.com](mailto:malaysia@flowcrete.com)  
Flowcrete Asia is an RPM company

Flowcrete Thailand  
522/41, Baan Klang Muang 1,  
Soi Sahakarnpramoon,  
Pracha-Uthit Road,  
Wangthonglang, Bangkok, 10310.  
Tel: (662) 2530 9611  
Fax: (662) 2530 9610

E-mail: [thailand@flowcrete.com](mailto:thailand@flowcrete.com)

Flowcrete Indonesia  
2nd Floor, Suite 203,  
Palma One Building,  
Jl. HR Rasuna Said Kav. X2 No. 4  
Jakarta Selatan 12950, Indonesia.  
Tel: +6221 252 3201  
Fax: +6221 252 0720

E-mail: [indonesia@flowcrete.com](mailto:indonesia@flowcrete.com)

Flowcrete Vietnam  
Representative Office  
3rd Floor, 130 Nguyen Cong Tru Street,  
Nguyen Thai Binh Ward,  
District 1, HCMC, Vietnam  
Tel: +848 3821 6561  
Fax: +848 3821 6501

E-mail: [vietnam@flowcrete.com](mailto:vietnam@flowcrete.com)