

Flowfresh SRQ



Description

Flowfresh SRQ is a heavy duty, chemical resistant, antimicrobial, polyurethane resin floor screed system with an attractive positively textured, coloured quartz finish.

Uses

Ideal for wet processing zones such as food manufacturing, food preparation areas, and chemical processing plants.


Benefits

- Proven antimicrobial performance
- Decorative floor finish with positive slip resistance
- High chemical resistance
- Easy to clean and sterilise
- Textured anti-slip surface
- Heat resistant to 70 °C
- Freeze/thaw resistant
- Non-tainting
- High abrasion resistance
- Withstands high mechanical stress
- Low odour during application
- Fast return to service

Project References

HEB, USA

System Design

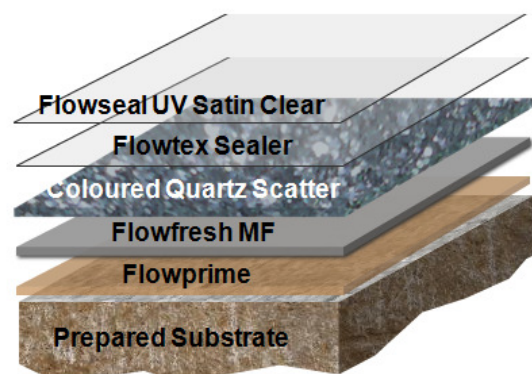

Standard Colour Chart




Dark Grey




Mid Grey



Light Grey




Light Blue




Green



Red



Yellow



Brown

The applied colours may differ slightly from the examples shown above.
Contact our customer services for a true colour sample or a special colour match.

Model Specification

Product: Flowfresh SRQ system
Finish: Matt
Thickness: Dependant on the specification
Colour: _____
Preparatory work and application in accordance with manufacturer's instructions.
Manufacturer: Flowcrete Asia Sdn. Bhd.
Telephone: Customer Service - +603 6277 9575

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm², free from laitance, dust and other contamination. The substrate should be surface dry and free from rising damp and ground water pressure.

Products Included in this System

Flowprime
Flowfresh MF
Coloured Quartz
Flowtex Sealer
Flowseal UV Satin Clear

Detailed application instructions are available upon request.

Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at www.flowcrete.com.my.

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Focus on the Floorzone

Flowcrete Asia Sdn Bhd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

Microbial / Fungal Resistance

The Polygiene® antimicrobial additive incorporated into Flowfresh SRQ provides control of most bacteria and fungi which come into contact with the floor.

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

| | |
|------------------------|---|
| Fire Resistance | BS476:Part 7 Surface Spread of Flame: Class 2 (indicative) |
| Slip Resistance | TRRL Pendulum Slip Test Dry >60 Wet min 45 (aggregate dependant) |
| Impact Resistance | BS8204 Part1 Cat: A (<0.5mm) ISO6272 1kg weight >1.8m 2kg weight >1.5m |
| Temperature Resistance | Tolerant up to 70°C |
| Water Permeability | Nil-Karsten Test (impermeable) |
| Vapour Permeability | ASTM E96:90 3g/m ² /24hrs (at 9mm thick) |
| Chemical Resistance | Contact Technical Department Excellent resistance to sugars and most acids (organic and inorganic) |
| Abrasion Resistance | Taber Abrader: 0.12g loss per 1000 cycles (1kg load using CS17 wheels) |
| Compressive Strength | >50 N/mm ² (BS6319) |
| Flexural Strength | 20 N/mm ² (BS6319) |
| Tensile Strength | 10 N/mm ² (BS6319) |
| Bond Strength | Greater than cohesive strength of 25 N/mm ² concrete. >1.5 MPa. |
| Toxicity (when cured) | Taint Free to sensitive foodstuffs |

Speed of Cure

| | 10°C | 20°C | 30°C |
|--------------------|---------|--------|--------|
| Light traffic | 36 hrs | 24 hrs | 12 hrs |
| Full traffic | 72 hrs | 48 hrs | 24 hrs |
| Full chemical cure | 10 days | 7 days | 6 days |

Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Further Information

To ensure you are specifying a fit for purpose flooring system for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

Flowcrete Asia Sdn Bhd (366254-X)
The Flooring Technology Centre
Lot 37631 & 37632, Jalan 6/37A,
Taman Bukit Maluri,
Industrial Area Kepong,
52100 Kuala Lumpur, Malaysia.
Tel: +(603) 6277 9575
Fax: +(603) 6277 4645
Email: malaysia@flowcrete.com
Flowcrete Asia is an RPM company

Flowcrete Thailand
522/41, Baan Klang Muang 1,
Soi Sahakarnpramoon,
Pracha-Uthit Road,
Wangthonglang, Bangkok, 10310.
Tel: (662) 2530 9611
Fax: (662) 2530 9610

E-mail: thailand@flowcrete.com

Flowcrete Indonesia
2nd Floor, Suite 203,
Palma One Building,
Jl. HR Rasuna Said Kav. X2 No. 4
Jakarta Selatan 12950, Indonesia.
Tel: +6221 252 3201
Fax: +6221 252 0720

E-mail: indonesia@flowcrete.com

Flowcrete Vietnam
Representative Office
3rd Floor, 130 Nguyen Cong Tru Street,
Nguyen Thai Binh Ward,
District 1, HCMC, Vietnam
Tel: +848 3821 6561
Fax: +848 3821 6501

E-mail: vietnam@flowcrete.com